



INSTALLATION

BLACK/CHROME ALLEY CAT AIR CLEANER COVER

9438

PARTS INCLUDED

- 1 Black Alley Cat Air Cleaner Cover with Chrome Mesh
- 1 Stay Ring—Black Plastic
- 1 Hardware Kit Containing:
 - 1 5/16"-18 to 1/4"-28 Stud
 - 1 Nylon Ratchet Washer
 - 1 Black/Chrome Tri-Bar Fastener
 - 3 Adhesive Backed Foam Blocks
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND NOTICES REGARDING THE USE AND CARE OF THIS PRODUCT.

WARNING

THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

NOTICE

This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

CAUTION

This indication alerts you to the fact that ignoring the contents described herein can result in potential injury or material damage.

NOTICE

IF INSTALLING THIS PRODUCT FOR ANOTHER PARTY, PLEASE MAKE SURE THEY RECEIVE THIS COPY OF THE INSTALLATION INSTRUCTIONS SO THEY ARE AWARE OF THE IMPORTANT INFORMATION CONTAINED IN THEM.

TOOLS SUGGESTED

Set of Hex Wrenches, Set of Combination Wrenches, Torque Wrench (in/lb), Socket Set, Blue Thread Locker

STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.

STEP 1

Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition.

WARNING

YOU WILL BE WORKING AROUND THE ENGINE AND EXHAUST SYSTEM DURING INSTALLATION. ENSURE THAT THE ENGINE AND EXHAUST SYSTEM HAVE FULLY COOLED TO PREVENT INJURY.

NOTE: Pictures shown of Chrome parts. Installation of Black parts will be the same.

CUSTOMER SERVICE

877.370.3604 (toll free)

INSTALLATION QUESTIONS

techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY

Küryakyn warrants that any Küryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Küryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
- The product must be properly installed, maintained and operated under normal conditions.
- Küryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
- Küryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Küryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Küryakyn and a customer.
- Küryakyn products are often intended for use in specific applications. Küryakyn makes no warranty if a Küryakyn product is used in applications other than intended.
- Küryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'S contained in components of Küryakyn products will be warranted for defects in materials and workmanship for 3 years from the date of purchase where as all other components shall be warranted for one(1) year. This includes, but is not limited to; control modules, wiring, chrome & other components.
- Küryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Küryakyn. Küryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

For purchasing Küryakyn® products, you can receive a complete catalog free of charge.

Send the Proof-of-Purchase below with your address to: Küryakyn, P.O. Box 339, Somerset, WI 54025.

Please indicate either Accessories Catalog for Harley-Davidson® or GL & Metric Cruisers.

Be sure to ask your local dealer about other Küryakyn® products, the motorcycle parts and accessories designed for riders by riders.

©2005 Küryakyn USA® All Rights reserved.



kuryakyn.com

STEP 2 Remove the existing air cleaner cover. Set aside, it will not be reused.

Küryakyn®

NOTE: If you have a Küryakyn Street Sleeper II air cleaner kit installed, P/N 9530 or P/N 9537, you will also need to remove the X Vibration Dampner Assembly and the Composure Strap. These will not be reused with the Alley Cat cover.

STEP 3 **For Küryakyn filters:** Insert the 5/16" (larger) end of the stud through the outside of the Alley Cat Cover. PIC 1






For Screamin' Eagle and Arlen Ness Filters: Rub the adhesive backing on the foam pads. Peel the backing off the pads and attach them to the back side of the Stay Ring. PIC 2 (the front side of the Stay Ring has a slight texture to it and there is a lip around the outside of the back) Place the black plastic Stay Ring over the end of the stud protruding from the inside of the Cover. PIC 3

STEP 4 Place a drop of blue thread locker on the 5/16" (larger) end of the stud. Place the Alley Cat Cover over the filter (and Stay Ring if needed for your application) and secure to the filter with the stud. Tighten to 36-60 in/lbs, lining up the flats on the stud with the dowels on the cover as shown in PIC 4.

STEP 5 Place the Nylon Ratchet over the hex on the stud on the outside of the cover. There are indents in the Nylon Ratchet that will fit over the dowels on the cover. PIC 4 You may have to loosen or tighten the stud slightly to get the indents and dowels to line up. PIC 5 Place a drop of blue thread locker on the threads of the stud and thread the Tri-Bar fastener to the stud. There are teeth on the Nylon Ratchet that the teeth on the Tri-Bar will engage to help hold the Tri-Bar in place. PIC 5 **The Tri-Bar only needs to be finger tight! DO NOT over tighten it! PIC 6**

CAUTION Ensure that the installation of this product does not interfere with the proper operation of the motorcycle before riding.

NOTICE It is the installer's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Küryakyn will not provide warranty coverage on products or components lost due to improper installation or lack of maintenance. Periodic inspection and maintenance are required on all fasteners.

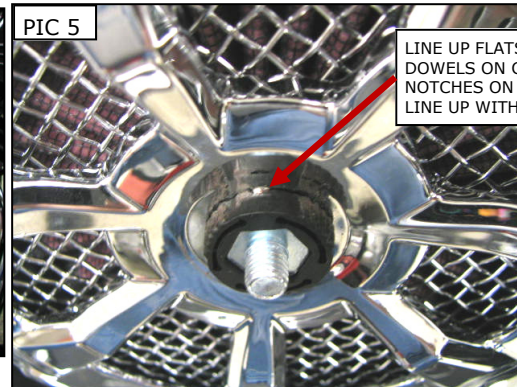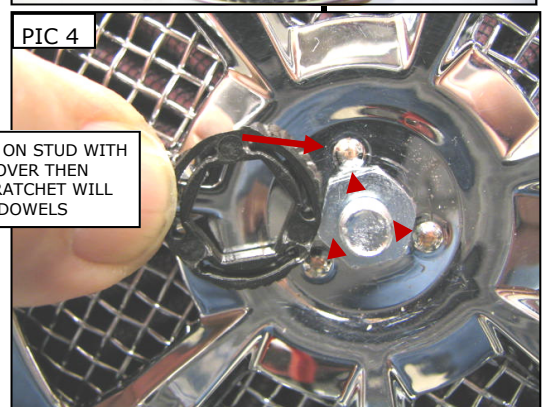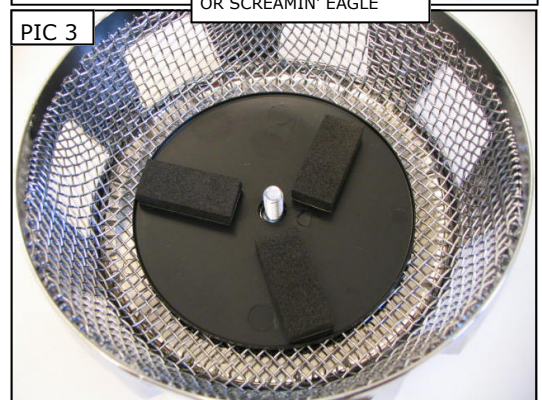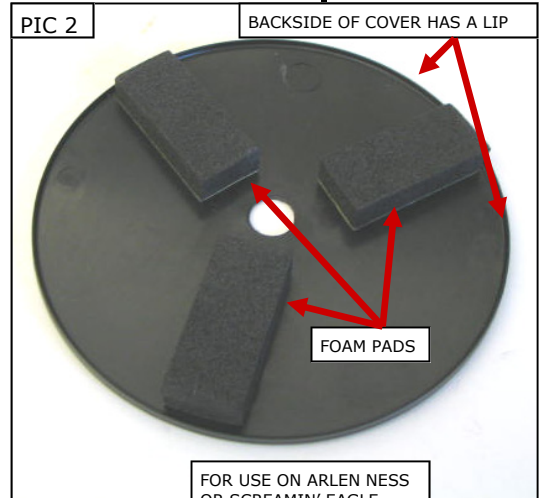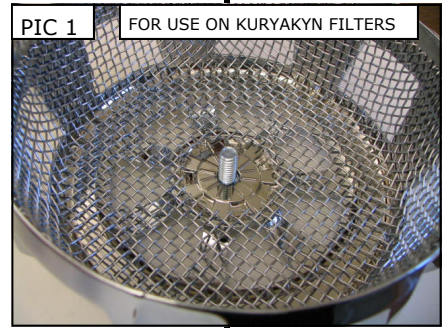

PAGE
2

Ride On!

ALLEY CAT AIR CLEANER COVER

INSTALLATION