



BAHN SHIFT LEVER

1095

THANK YOU FOR CHOOSING KÜRYAKYN!

PROTECT YOURSELF AND OTHERS FROM POSSIBLE INJURY AND PROPERTY DAMAGE OR LOSS. PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS, AND NOTICES REGARDING THE INSTALLATION, USE, AND CARE OF THIS PRODUCT.

WARNING

THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

CAUTION

This indication alerts you to the fact that ignoring the contents described herein can result in minor or moderate potential injury.

NOTICE

This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality or damage the product itself or the product to which it is being attached.

MAKE SURE THE FOLLOWING PARTS HAVE BEEN INCLUDED IN THE KIT:

- 1 BAHN Shift Lever
- 1 Hardware Kt containing:
 - 1 BAHN Shift Peg
 - 1 5/16"-24 X 2.5" Socket Head Cap Screw
 - 1 Washer
 - 1 5/16"-24 X .875" Socket Head Cap Screw
- 1 Installation Instructions

TOOLS SUGGESTED:

Set of combination wrenches, set of hex wrenches, non-permanent marker, (242 Medium Strength) Blue Loctite

WARNING

DURING THE INSTALLATION OF THIS PRODUCT, THE VEHICLE MAY BE SHIFTED INTO GEAR. STARTING THE VEHICLE WHILE IN GEAR CAN CAUSE SUD- DEN VEHICLE MOVEMENT RESULTING IN SERIOUS INJURY OR DEATH. ENSURE THE VEHICLE IS NOT IN GEAR **BEFORE** START-UP.

STEP 1

Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition. Allow the engine and exhaust system to cool.

WARNING

YOU WILL BE WORKING AROUND THE ENGINE AND EXHAUST SYSTEM DURING INSTALLATION. ENSURE THAT THE ENGINE AND EXHAUST SYSTEM HAVE FULLY COOLED TO PREVENT INJURY.

CUSTOMER SERVICE

877.370.3604 (toll free)

INSTALLATION QUESTIONS

techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
- The product must be properly installed, maintained and operated under normal conditions.
- Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
- Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
- Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
- Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'S contained in components of Kuryakyn products will be warranted for defects in materials and workmanship for 3 years from the date of purchase where as all other components shall be warranted for one(1) year. This includes, but is not limited to; control modules, wiring, chrome & other components.

- Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

For purchasing Kuryakyn® products, you can receive a complete catalog free of charge. Send the Proof-of-Purchase below with your address to: Kuryakyn
454 County Road V V
Somerset, WI 54025-9031
Please indicate either Accessories Catalog for Harley-Davidson® or GL & Metric Cruisers.

Be sure to ask your local dealer about other Kuryakyn® products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA® All Rights reserved.



kuryakyn.com



CAUTION

Working around the sharp edges of the cylinder-head fins exposes your hands to injury. Wear protective gloves to prevent injury.

Küryakyn®

STEP 2

Refer to **PIC 1**. Measure between the shift pegs and the top plane of the board. Use a non-permanent marker to mark the angle of the existing shift levers on the end of the shift shaft.

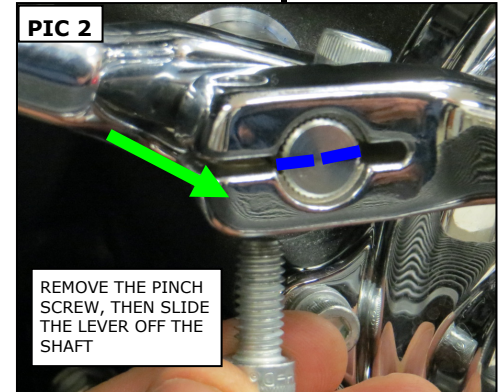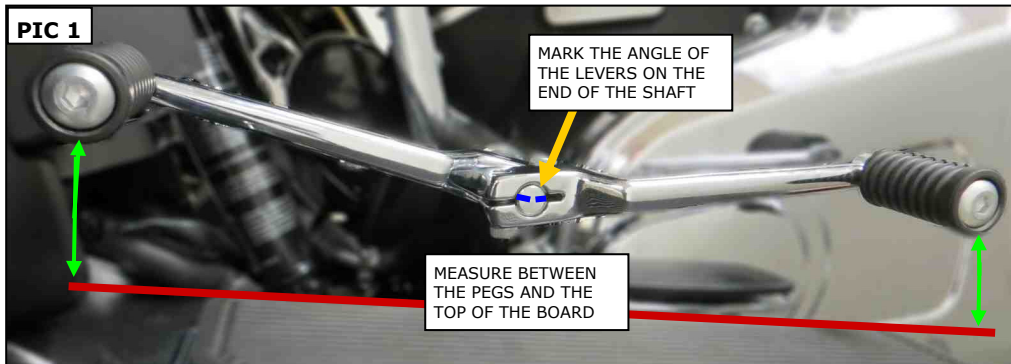

STEP 3

Refer to **PIC 2**. Remove the existing pinch screws from the shift levers; set them aside, they will not be reused. Slide the existing shift levers off of the shift shaft; set them aside, they will not be reused.

NOTE:

Shift lever/peg height is the end user's preference. Use the marks and measurements as a starting point when adjusting the position of the levers on the shift shaft. During installation, ensure proper clearance between the shifting mechanism and the boards.

WARNING


THE END USER'S SAFETY DEPENDS UPON PROPER INSTALLATION OF THIS PRODUCT. IF A STEP IN THIS SET OF INSTRUCTIONS IS NOT WITHIN YOUR CAPABILITIES OR YOU DO NOT HAVE THE CORRECT TOOLS, HAVE YOUR DEALER PERFORM THE PROCEDURE. IMPROPER INSTALLATION OF THIS PRODUCT COULD RESULT IN DEATH OR SERIOUS INJURY.

STEP 4

Refer to **PIC 3**. Align the BAHN Shift Lever(s) with the marks and slide the them onto the shift shaft. Measure the distance to the top plane of the board; remove the levers from the splined shaft if any adjustments are necessary.

STEP 5

Secure the BAHN Shift Lever(s) on the shaft with the included 5/16"-24 X .875" Socket Head Cap Screws and Washers.

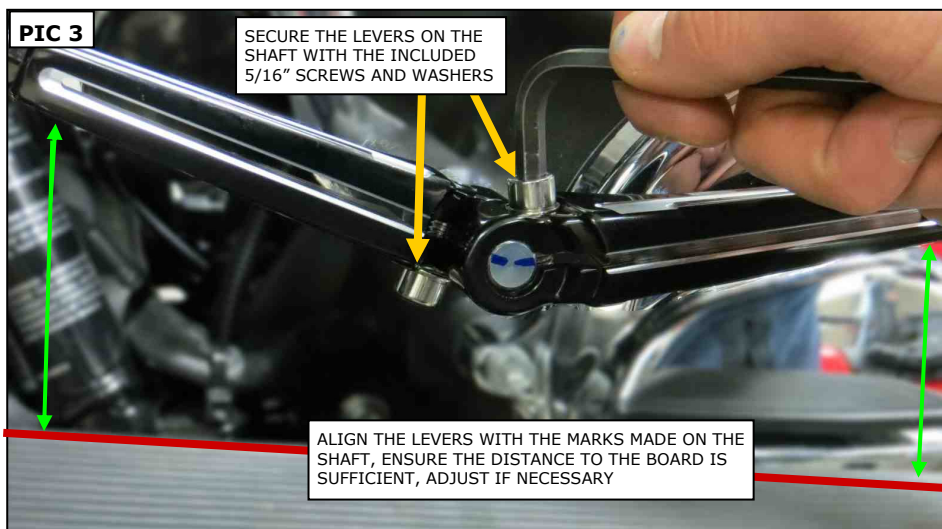

-cont.-

PAGE
2

BAHN SHIFT LEVER

INSTALLATION

NOTE:


Prepare the included 5/16"-24 X 2.5" Socket Head Cap Screws according to the thread locker manufacturer's recommendations.

STEP 6

Insert the included 5/16"-24 X 2.5" Socket Head Cap Screws through the BAHN Pegs. Apply blue Loctite (242 Medium Strength) to the exposed screw threads. Thread the screws into the Shift Levers; tighten the screws.

STEP 7

Ensure that the bike is in neutral **BEFORE** starting the bike. Ensure proper function of the shifting mechanism **BEFORE** operating the bike.

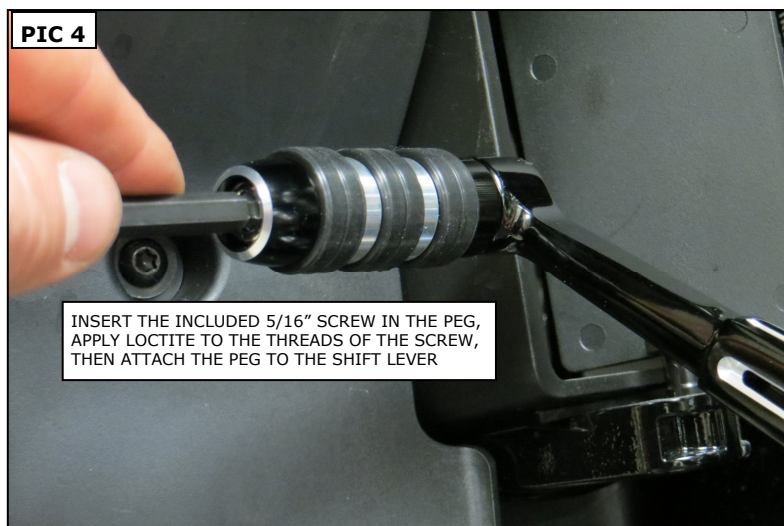**NOTICE**

It is the end user's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Kuryakyn will not provide warranty coverage on products or components lost due to improper installation or lack of maintenance. Periodic inspection and maintenance are required on all fasteners.

T
I
P
S
F
O
R
P
R
O
P
E
R
C
A
R
E
:

PAGE

3

Ride On!